



# THE UK LID

**FOR USE WITH 1200MM X 1000MM PALLETS: FOR SAFER AND MORE EFFICIENT INTERNAL AND EXTERNAL HANDLING AND TRANSPORTATION**

The standard Loadhog lid is a safe and practical way of securing conventional and returnable packaging such as plastic containers, tote bins, cardboard boxes and crates stacked on 1200mm x 1000mm wooden or plastic pallets.

## KEY DATA :


- weight: 2 strap: 12kg / 4 strap: 14.75kg
- external dimensions: width: 1018mm / length: 1218mm / overall height: 105mm
- stacking height when nested: 14 units/metre
- maximum load stacking height: 2500mm
- maximum locking load per strap: up to 140kg
- maximum stackable load: 1000kg
- lid and chassis material: recyclable polypropylene
- RFID transponder: ISO 15962 passive tag, read/write 2k bits
- temperature: maximum +40°C, minimum -10°C.

## PRODUCT OPTIONS :

- Colour
- Activated RFID system
- Raised upstands
- 2 or 4 strap configuration
- Tamper evidence tags
- Hot foil stamping
- Strap customisation
- Document holder



UK LID IN USE

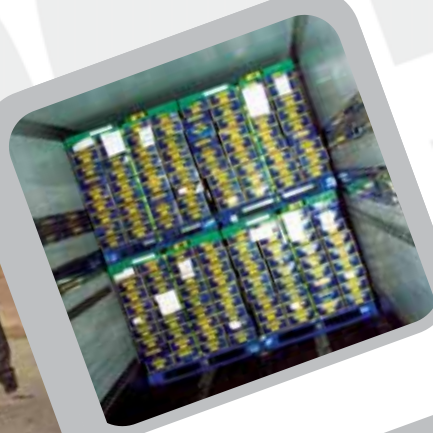



# THE UK LID

## OPERATION



**To apply:** Position the Loadhog lid on the top of the load



Draw the webbing out by pulling out the hook bar



Attach the hook to the runner either side of the centre block holding with foot without bending



Rotate ratchet 'to and fro' until the strap is at your required tension

Repeat sequence for all straps



**To remove:** Slide release button fully to the left



**To unlock:** Push handle firmly to the left until you hear a click and tension releases



Unhook the webbing and guide as it retracts into the lid

Repeat sequence for all straps



CAUTION

